
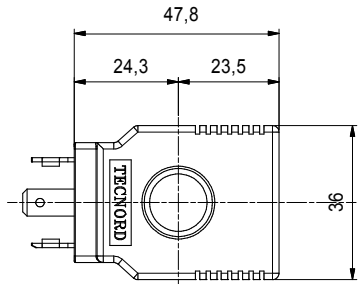


“P” TYPE “J” COIL



DESCRIPTION

1/2 inch (13 mm) I.D. Coil.
Color identification: black

FEATURES

One piece encapsulated design that is:

- Weatherproof
- Immersion proof
- Thermal shock/dunk tested
- No external metal shell
- Internal arc suppression diode available on request

COIL SPECIFICATION

| | |
|---------------------------|--|
| Wattage | 21 Watts Nominal |
| Duty Rating | Continuous Duty ±10% rated voltage at 120°F (49°C) ambient |
| Min Current for Actuation | 80% of rated current at room temperature |
| Magnet Wire Class | H |
| Heat insulation Class | F |
| Ambient Temperature Range | -30° to 60°C |
| Encapsulation Material | Thermo-Plastic, resistant to moisture, caustic solutions, fungus, and vibrations |






JA

JL

JJ

JD

JH



ORDERING INFORMATION

P - -

Approximate Coil Weight: .42 lbs (.19 kg)

TERMINATIONS

- “J” Coil AMP Superseal - Integral
- “J” Coil Double lead
- “J” Coil AMP Jr. Timer - Integral
- “J” Coil Deutsch - Integral DT04-2P
- “J” Coil DIN 43650 (Hirschmann)

- JA** 12
- JL** 24
- JJ** 26
- JD**
- JH**

VOLTAGE

- 12 VDC / 6.8 Ohm
- 24 VDC / 27 Ohm
- 26 VDC / 32 Ohm

WARNING: the specifications/application data shown in our catalogs and data sheets are intended only as a general guide for the product described (herein). Any specific application should not be undertaken without independent study, evaluation, and testing for suitability.



4484 Boeing Drive Rockford, IL 61109 • USA • Phone +1 (815) 397-6628 • Fax +1 (815) 397-2526
mail: delta@delta-power.com • www.delta-power.com



Via Malavolti, 36 • 41122 Modena • ITALY • Phone +39 (059) 254895 • Fax +39 (059) 253512
mail: tecnord@tecnord.com • www.tecnord.com