


**IMMERSION PROOF "D" TYPE "I" COILS**

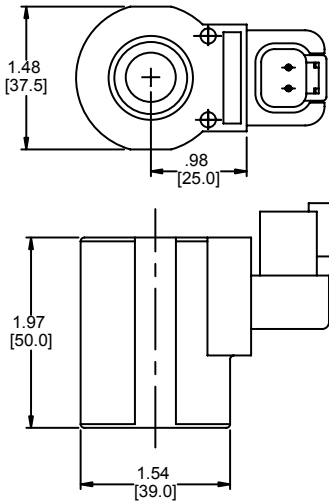

**DESCRIPTION**

1/2 inch (13 mm) I.D. Immersion Proof Coil.


**FEATURES**

One piece encapsulated design that is:



- Weatherproof
- Immersion proof
- Thermal shock / dunk tested
- No external metal shel

**COIL SPECIFICATION**



Wattage	24 Watts Nominal
Duty Rating	Continuous Duty ±10% rated voltage at 70°F (21°C) ambient
Min Current for Actuation	90% of rated current at room temperature
Magnet Wire Class	H or Better for all voltages
Temperature Range	-40° to 392°F (-40° to 200°C)
Encapsulation Material	Thermo-Plastic, resistant to moisture, caustic solutions, fungus, and vibrations





IA




IJ



ID



IM



**ORDERING INFORMATION**

D - - -

Approximate Coil Weight: .49 lbs (.22 kg)

**TERMINATIONS**

- AMP Superseal - Integral
- Deutsch - Integral DT04-2P
- AMP Junior Timer - Integral
- Metri-Pack - Integral

- IA 12
- ID 24
- IJ
- IM

**VOLTAGE**

- 12 VDC / 2.0 Amp Yellow Lettering
- 24 VDC / 1.0 Amp Blue Lettering

NOTE: Pull type valves require nut 36202073 in lieu of standard nut. Push type valves require nut 36202071 in lieu of standard nut.

W7 / 2017

WARNING: the specifications/application data shown in our catalogs and data sheets are intended only as a general guide for the product described (herein). Any specific application should not be undertaken without independent study, evaluation, and testing for suitability.



4484 Boeing Drive Rockford, IL 61109 • USA • Phone +1 (815) 397-6628 • Fax +1 (815) 397-2526  
 mail: delta@delta-power.com • www.delta-power.com



Via Malavolti, 36 • 41122 Modena • ITALY • Phone +39 (059) 254895 • Fax +39 (059) 253512  
 mail: tecnord@tecnord.com • www.tecnord.com